

OMRON

Model **FLV-□IR/-□UV**

IR Lighting/UV Lighting

INSTRUCTION SHEET

Thank you for selecting OMRON product. This sheet primarily describes precautions required in installing and operating the product. Before operating the product, read the sheet thoroughly to acquire sufficient knowledge of the product. For your convenience, keep the sheet at your disposal.

TRACEABILITY INFORMATION:
 Representative in EU:
 OMRON EUROPE B.V.
 Wegalaan 67-69
 2132 JD Hoofddorp,
 The Netherlands

Manufacturer:
 OMRON CORPORATION
 Shikoji Horikawa, Shimogyo-ku,
 Kyoto 600-8530 JAPAN
 Ayabe Factory
 3-2 Narutani, Nakayama-cho,
 Ayabe-shi, Kyoto 623-0105 JAPAN

The following notice applies only to products that carry the CE mark:
 Notice:
 This is a class A product. In residential areas it may cause radio interference, in which case the user may be required to take adequate measures to reduce interference.



PRECAUTIONS FOR SAFE USE

- Please observe the following precautions for safe use of the products.
- Installation Environment**
 - Do not use the product in environments where it can be exposed to inflammable/explosive gas.
 - To secure the safety of operation and maintenance, do not install the product close to high-voltage devices and power devices.
 - Tighten the screws with the specified torque in this document.
 - Power Supply and Wiring**
 - For details on power supply and wiring, refer to PRECAUTIONS FOR SAFE USE on the INSTRUCTION SHEET of the dedicated controller (FLV-TCC4□/-TCC1□/-TCC3HB□/FLV-ATC□1024□).
 - When connecting or disconnecting the lighting connector, be sure to turn off the power of the unit. Not doing so may result in malfunction.
 - The temperature may reach 70°C while power is being supplied under thermally neutral environment. Do not touch the product directly. Be sure to wear heat-resistant gloves.
 - High-Voltage lines and power lines must be wired separately from this product. Wiring them together or placing them in the same duct may cause induction, resulting in malfunction or damage.
 - Take sufficient safety measures such as fail-safe circuit to use the product.
 - Others**
 - Do not use in safety circuits for atomic energy or that are critical for human life.
 - Do not attempt to disassemble, deform by pressure, incinerate, repair, or modify this product.
 - When disposing of the product, treat as industrial waste.
 - Be sure to connect a dedicated lighting controller (FLV-TCC4□/-TCC1□/-TCC3HB□, FLV-ATC□1024□). Use of other devices may result in fire, explosion, malfunction or failure.
 - If you notice an abnormal condition such as a strange odor, extreme heating of the unit, or smoke, immediately stop using the product, turn off the power, and consult your dealer.
 - Do not drop or impose excessive vibration or shock on the product. It may cause breakdown of the product.
 - Ensure that all components which have locking mechanisms are locked before using the product.
 - Make sure not to drop the product when unpacking or moving it.
 - Regulations and standards**
 - This lighting complies with the EN standard (EN61326) with a EMC directive (No.2004/108/EC).

PRECAUTIONS FOR CORRECT USE


- Observe the following to prevent failure, malfunctioning, and adverse effects on performance and the device.
- Installation site**
 - Do not install in the following locations:
 - Locations where the ambient temperature exceeds the rated temperature range.
 - Locations subject to sudden temperature changes (where condensation will form).
 - Locations where the relative humidity is below or above 35 to 85% RH.
 - Locations where there are corrosive or flammable gases.
 - Locations where there is dust, salt, or iron powder.
 - Locations where the device will be subject to direct vibration or shock.
 - Locations where there is strong scattered light (laser light, arc welding light, ultraviolet light, etc.)
 - Locations exposed to direct sunlight or next to a heater.
 - Locations where there is splashing or spraying of water, oil, or chemicals.
 - Locations where there is a strong electrical or magnetic field.
 - Maintenance**
 - Do not install the product close to high-voltage devices and/or power devices in order to secure the safety of operations and maintenance.
 - When this product and a cable are attached or removed, be sure to turn OFF the power of the Controller first before operation.
 - Never use paint thinner, benzen, acetone, or kerosene to clean the product. Wipe the contamination with a soft cloth included a small amount of alcohol.
 - Power and cable connections**
 - When using a commercially available switching regulator, make sure that the Frame ground terminal is grounded.
 - If there are surges on your power line, connect a surge absorber as appropriate for your conditions of use.
 - Before turning on the power after the wiring is completed, verify that the power is correct, that there are no incorrect connections such as a shorted load circuit, and that the load current is suitable. Incorrect wiring may cause damage and failures.
 - Use the product with the specified voltage. Applying a voltage or AC voltage that exceeds the rating may result in burning or explosion of circuit components.
 - For cable extension between the lighting and lighting controller, use an optional extension cable (FLV-XC□/-XC□R) or branch cable (FLV-XC□S2). Only one extension cable and branch cable can be used.
 - The bending radius at cable wiring must be at least 20 mm.
 - Warning Up**
 - After turning on the power supply, allow the controller to stand for at least 30 minutes before use. As the circuits are unstable immediately after power on, brightness may gradually change.
 - Lighting electricity**
 - Lighting electricity for lighting equipment to be connected to the Lighting Controller is limited. Be sure to check the lighting electricity written on the plate of the product, label of the packaging box or this manual to connect a lighting within the specified value.
 - Static Electricity**
 - LEDs are easily damaged by static electricity. A grounded wrist strap should thus be used when installing or conducting maintenance on the Diffusion Board. When removing diffuser plate of UV Lighting, influence of static electricity becomes easy to undergo, so please be careful in particular.
 - About diffuser plate of UV Lighting**
 - There is a possibility that diffuser plate discolors by usage state, so it's recommended to exchange it periodically.

Specifications

Item	Model	FLV-DR5030IR	FLV-DR7030IR	FLV-DR9030IR	FLV-BR6022IR	FLV-BR11222IR	FLV-BR21230IR	FLV-CL60IR	
Applicable Controllers		FLV-DR6030UV	FLV-DR7530UV	FLV-DR9030UV	FLV-BR6424UV	FLV-BR11624UV	FLV-BR21230UV	FLV-CL60UV	
Lighting color (peak wavelength)		IR:Infrared light(Typ.850nm), UV:Ultraviolet light(Typ.385nm)							
Light source		LED							
LED Safety		Risk Group 1 (IEC62471)							
Electricity	Infrared light	1.3W	2.6W	4.3W	0.9W	1.8W	6.1W	3.9W	
	Ultraviolet light	3.2W	5.4W	6.8W	1.8W	3.6W	7.8W	3.0W	
Insulation Resistance		20MΩ (250VDC)							
Ambient Temperature		Operating: 0 to +50°C, Storage: -15 to +60°C (with no icing or condensation)							
Ambient Humidity		Operating and storage: 35% to 85% (with no condensation)							
Degree of Protection		IP20 (IEC60529)							
Vibration Resistance(destructive)		10 to 150 Hz, (0.7mm double amplitude) 80 min. each in X, Y, and Z directions							
Shock Resistance (destructive)		150 m/s ² 3 times each in 6 directions(up/down, left/right, forward/backward)							
Materials		Case : Aluminum							
Weight	IR:Approx.60g	IR:Approx.120g	IR:Approx.200g	IR:Approx.60g	IR:Approx.100g	IR:Approx.220g	IR:Approx.230g	Approx.380g	
	UV:Approx.90g	UV:Approx.150g	UV:Approx.220g	UV:Approx.70g	UV:Approx.120g	UV:Approx.230g			
Accessories		Instruction sheet (this sheet)							


Connection with Lighting Controller

•Mounting
 Align the positions of "the tab of the connector at the lighting cable" and "protrusion of the lighting connector at the Lighting Controller", and then insert it until it clicks.

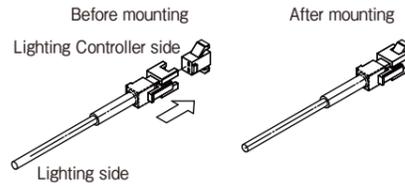

•Removing
 Hold "the tab of the connector at the lighting cable" in the arrow (←) direction and pull it straight.

[Note]
 Do not pull out with excessive force without pressing the tab. Doing so may break the wire.

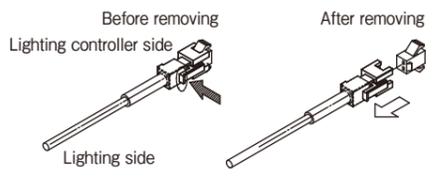

PRECAUTIONS ON SAFETY

Meanings of Signal Words

WARNING Indicates a potentially hazardous situation which, if not avoided, will result in minor or moderate injury, or may result in serious injury or death. Additionally, there may be significant property damage.

CAUTION Indicates a potentially hazardous situation which, if not avoided, may result in minor or moderate injury or in property damage.

Alert Statements in This Sheet

WARNING

This product is not designed or rated for ensuring safety of persons either directly or indirectly. Do not use it for such purposes.

Do not disassemble the product. Doing so may cause electric shock due to the high voltage portion. Burn also may result due to high temperature. Do not attempt to disassemble, deform by pressure, incinerate, repair, or modify this product.

Looking into the LED light continuously may cause visual impairment. Do not look directly into the LED light. Direct exposure of eye or skin to ultraviolet light will damage eyesight or the skin. Never look into or expose the body to the ultraviolet light. Work wearing protection glasses and protection equipment if exposure to the reflected ultraviolet light is considered.

CAUTION


Do not use it exceeding the rated voltage. There is a possibility of failure and fire.

Do not connect amplifier units to AC power supply. Risk of explosion.

Beware of danger of burns. Do not touch the case while the Lighting is ON or immediately after the power is turned OFF, since it is extremely hot.


Dimensions (Unit:mm)

●FLV-DR5030IR

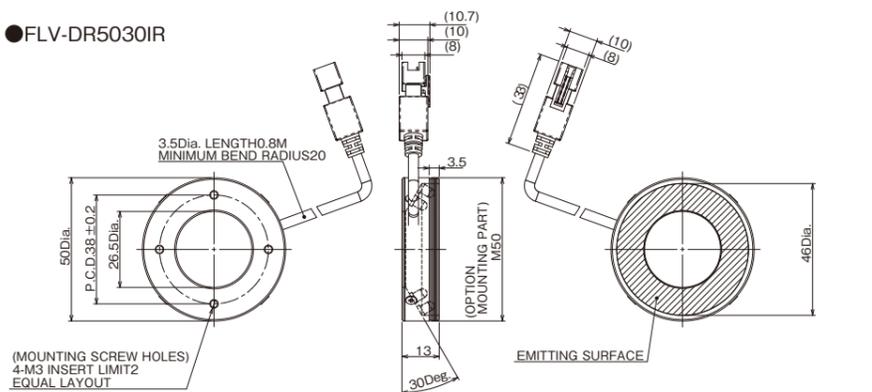


Tightening torque: 0.54N · m

●FLV-DR7530UV

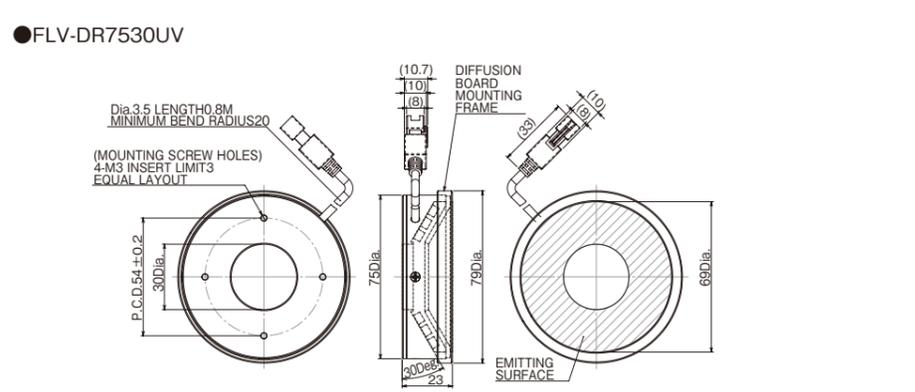


Tightening torque: 0.54N · m

●FLV-DR6030UV

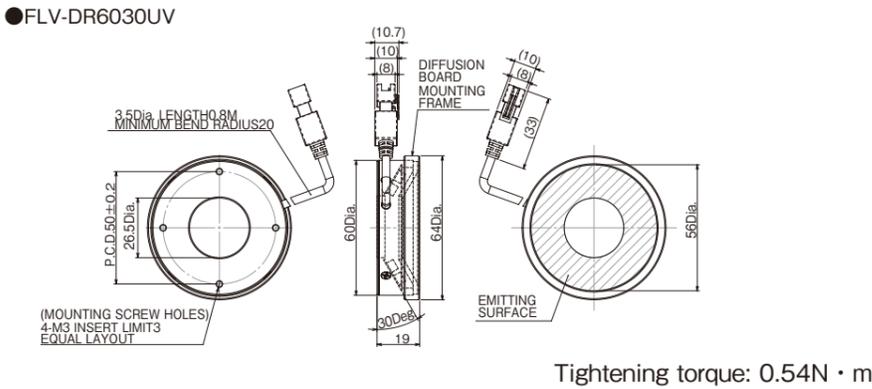


Tightening torque: 0.54N · m

●FLV-DR9030IR

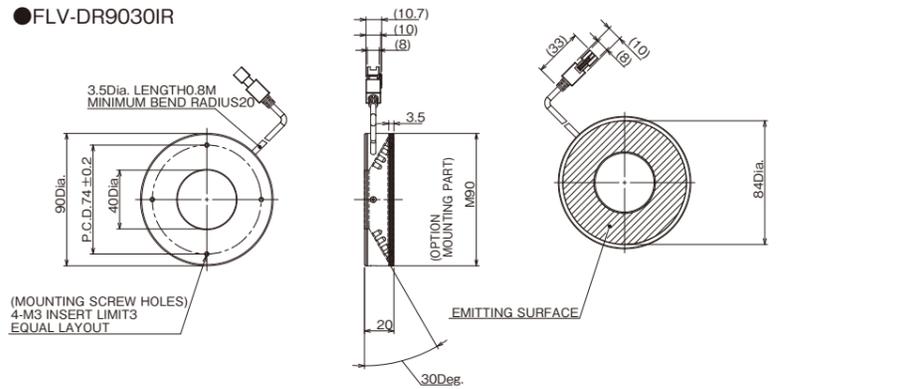


Tightening torque: 0.54N · m

●FLV-DR7030IR

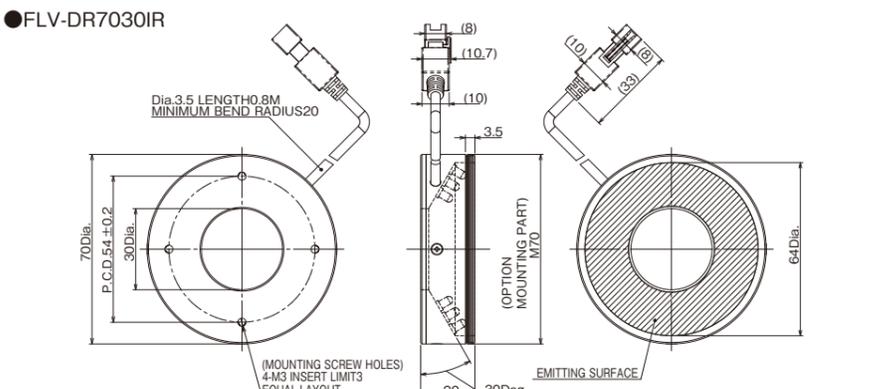

Tightening torque: 0.54N · m

●FLV-DR9030UV

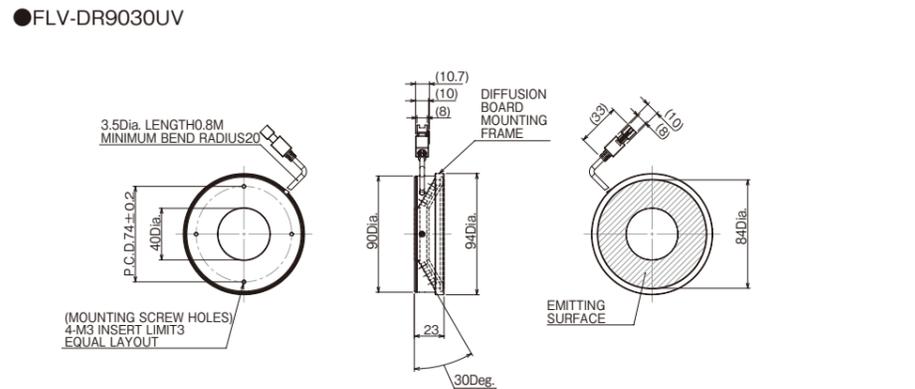

Tightening torque: 0.54N · m

